


Notes:-

- All pipework to be plastic.
- Non concussive taps.
- 22mm water inlet & main feeder pipe.
- 15mm "T" off to all cisterns, sinks & water heaters.
- 110mm outlet to have a straight coupler to exit, with no pipe through unit wall.
- Individual isolators to all cisterns, sinks & water heaters.
- All cubicles to have stench pipes.
- All keys on toilets to be same differ.
- All cubicles to be dark grey.
- Toilet roll holders bolted through cubicle wall.
- Coat hooks on back of cubicle door.
- Water heater to be **not** Redring.
- Thermostatic down blow heaters.
- All cubicles & vanity screen must not go to the floor.

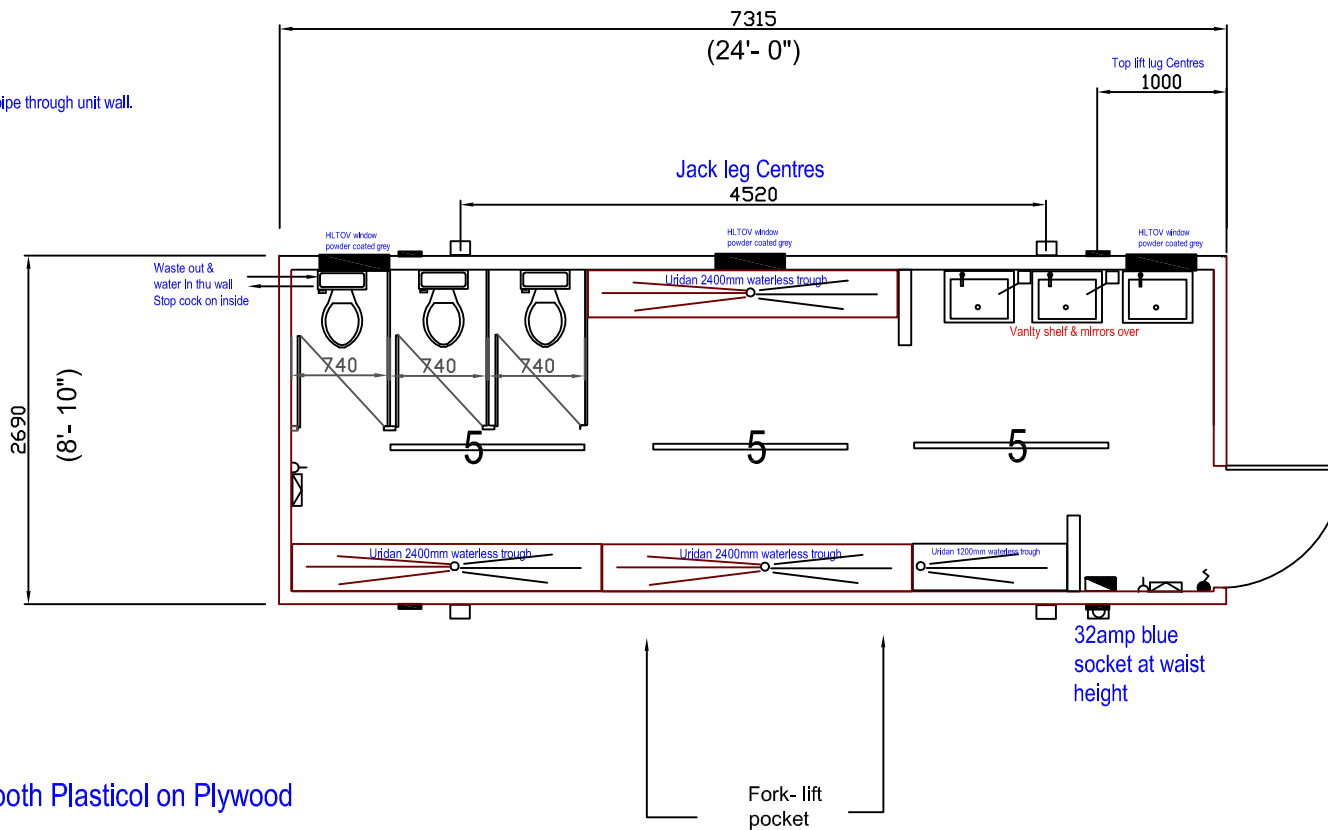

| | |
|--|-------------------------------------------|
| | Fan heater |
| | Delonghi 2Kw heater |
| | Dimplex 1kw oil filled |
| | Tube heater |
| | 5ft light |
| | 5ft CAT2 light |
| | 2D bulkhead light |
| | 13a double socket |
| | pull switch |
| | light switch |
| | fuse spur |
| | hager consumer unit |
| | c/w external isolator |
| | extractor fan |
| | 15l hyco under water heater |
| | 5ltr hyco oversink water heater |
| | stuart turner water pump |
| | low flush W/C |
| | 1000mm stainless steel sink c/w base unit |
| | wash hand basin HSE |
| | small WHB |
| | urinal |
| | coat hooks |
| | high level earth blank |

Specification:-

- Approx weight -- 3000kgs
- Internal Wallboard - White Smooth Plasticol on Plywood
- ROCKWOOL INSULATION
- Grey skirting & white window trims.
- Ceiling - White vinyl on ply.
- Flooring - 18mm plywood covered by **GREY NON SLIP** Polyflor c/w welded seams
- Electrics- Sub-Surface
- Exterior colours:
- WALLS:- GOOSEWING GREY 10-A-05
- DOORS:- MERLIN GREY 18-B-25
- STACKABLE** JACKLEGS:- MERLIN GREY 18-B-25

- Length -- 7315mm
- Width -- 2690mm
- Side panel -- Flatsided steel
- 100mm x 50mm bottom rail (**INVERTED**)
- 76mm x 38mm top rail (**INVERTED**).
- Fork pockets.
- Door to be bolted in
- 4 No top lifting lugs + **LOW LEVEL LIFT**

24' x 9' Qdos MALE WC PLAN

