


161 Type F


Single Sex Toilet and Shower

Dimensions	
External Length	5.09m
External Width	2.90m
External Height	2.61m
Leg Centres (length)	4.85m
Leg Centres (width)	2.81m
Shell weight	2268kg
Max handling weight	2650kg

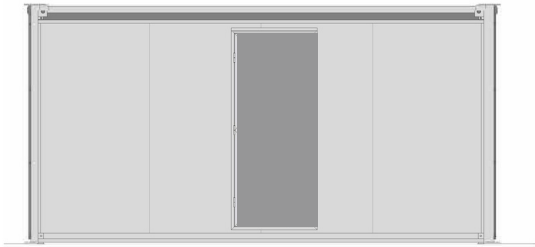


Plumbing Connections	
Water Inlet	1 x 15mm
Waste Outlet	1 x 110mm
Running pressure require	2-4 bar
Inlet flow rate required	30 litres per minute

Electrical Loading	
Three Phase 400v	
11 Amp (total loading across all phases)	
44 Amp per phase	

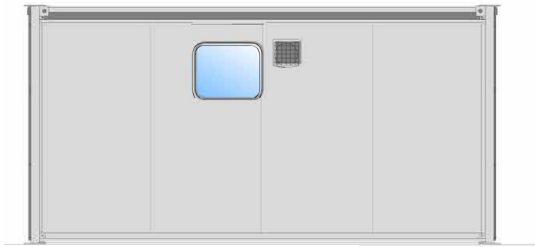

Fixtures & Fittings	
1 x 926mm Outward Opening External Door with Lock	
3 x High Level, Obscured Windows	
2 x WC	
2 x Shower Cubicles & Showers	
2 x Wash Hand Basin	
2 x Urinal	
2 x Over sink Water Heaters	
2 x High Level Convector Heater	
1 x Extractor Fan	
2 x Soap Dispenser	
2 x Toilet Roll Dispenser	
1 x Paper Towel Dispenser	
1 x Waste Paper Bin	
1x Battery Operated Air Freshener	
4 x Hat & Coat Hook	
2 x Mirror	




Important Building Information

All Qdos buildings are thoroughly cleaned and tested prior to delivery. An electrical test certificate and functional plumbing test certificate are provided within the building for inspection.

The final connections from services on site into the Qdos building should be carried out by a suitably qualified and competent professional.

The following services are excluded unless otherwise stated. A quotation is available on request:



- ▶ Foundation pads and enabling works
- ▶ On site supervision of installation and removal activities
- ▶ Final connection to services provided by others
- ▶ Chlorination of pipe work
- ▶ WRAS compliance - upgrade of all fittings to meet the Water Supply (Water Fitting) Regulations 1999
- ▶ Foul waste containment and mains free potable water solutions
- ▶ Access solutions
- ▶ Replenishment of consumables

