
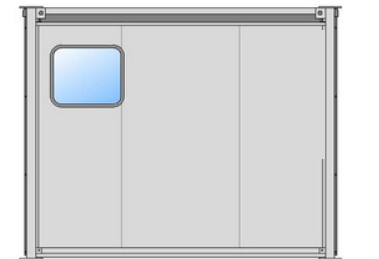
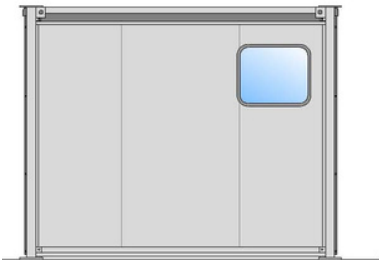


202 Type J

Six cubicle shower

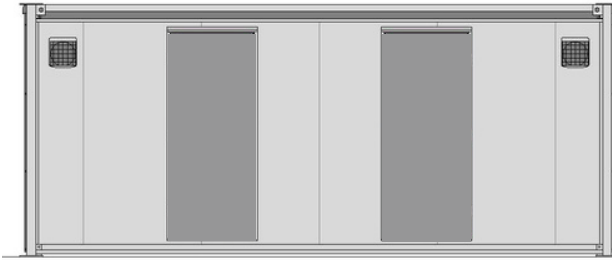

Dimensions

External Length	6.09m
External Width	3.27m
External Height	2.61m
Leg Centres (length)	5.85m
Leg Centres (width)	3.18m
Shell weight	3115kg
Max handling weight	3205kg

Plumbing Connections

Water Inlet	1 x 22mm	1 x 22mm
Waste Outlet	2 x 50mm	2 x 50mm
Running pressure required	2.5 bar	2.5 bar
Inlet flow rate required	48 litres per minute	48 litres per minute

Electrical Loading

Three Phase 400v
222 Amp (total loading across all phases)
74 Amps per phase

Fixtures & Fittings

2 x 926mm Outward Opening External Door with Lock
1 x Internal Connecting Door with Lock
1 x Internal Service Cupboard with Door and Lock
2 x High Level, Obscured Windows
6 x Shower Cubicle
2 x High Level Convector Heater
2 x Extractor Fan
2 x Shaver Sockets
2 x Battery Operated Air Freshener
6 x Hat & Coat Hook
2 x Mirror
2 x Bench Seats

Important Building Information

All Portaloo buildings are thoroughly cleaned and tested prior to delivery. An electrical test certificate and functional plumbing test certificate are provided within the building for inspection.

The final connections from services on site into the Portaloo building should be carried out by a suitably qualified and competent professional.

The following services are excluded unless otherwise stated. A quotation is available on request:

- ▶ Foundation pads and enabling works
- ▶ On site supervision of installation and removal activities
- ▶ Final connection to services provided by others
- ▶ Chlorination of pipe work
- ▶ WRAS compliance - upgrade of all fittings to meet the Water Supply (Water Fitting) Regulations 1999
- ▶ Foul waste containment and mains free potable water solutions
- ▶ Access solutions
- ▶ Replenishment of consumables

202 Type J

Six cubicle shower

