


282 Type V

Male / Female and Accessible Toilets

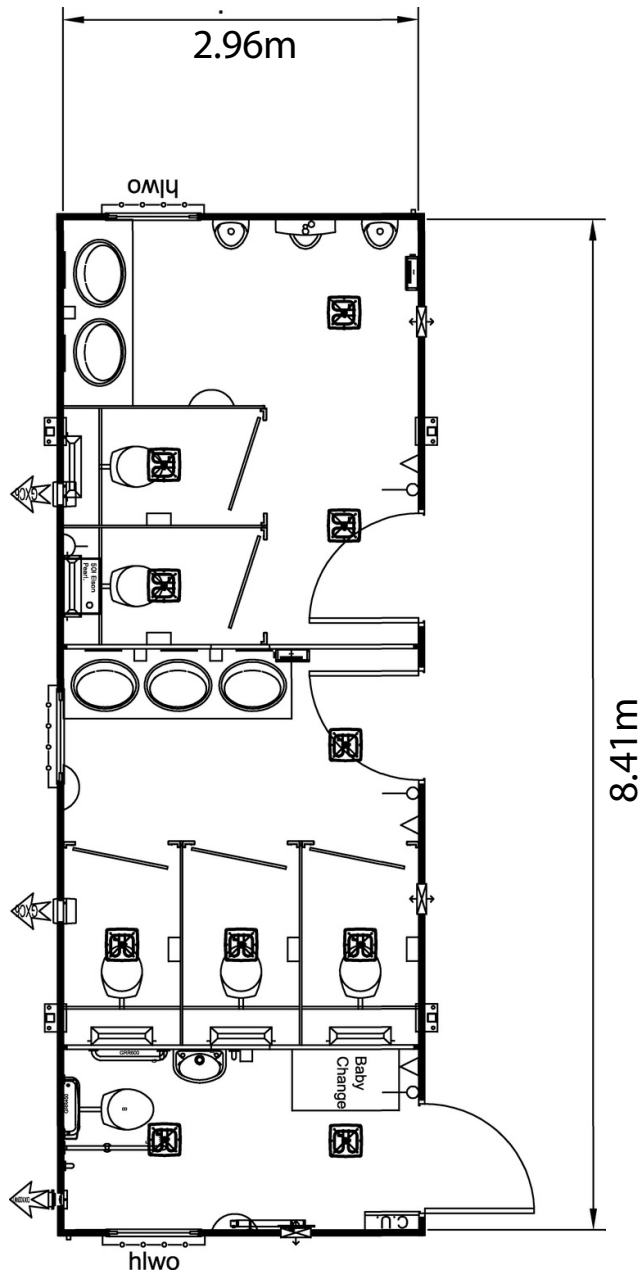

Dimensions	
External Length	8.64m
External Width	3.27m
External Height	2.61m
Leg Centres (length)	.88m
Leg Centres (width)	3.18m
Shell weight	3713kg
Max handling weight	3925kg

Plumbing Connections	
Water Inlet	1 x 22mm
Waste Outlet	2 x 110mm
Running pressure require	1 bar
Inlet flow rate required	57 litres per minute

Electrical Loading	
Single phase 230v	
42 Amp (total)	

Fixtures & Fittings	
1 x 926mm Outward Opening External Door with Lock	
2 x 926mm Inward Opening External Door with Lock	
3 x High Level, Obscured Windows	
6 x Wash Hand Basin	
3 x Urinal	
6 x WC	
1 x DDA Compliant Grab Rail Pack	
1 x 50L Water Heater	
3 x High Level Convector Heater	
3 x Extractor Fan	
3 x Soap Dispenser	
3 x Paper Towel Dispenser	
3 x Waste Paper Bin	
6 x Toilet Roll Dispensers	
3 x Battery Operated Air Freshener	
6 x Hat & Coat Hook	
6 x Mirror	
1 x Fold Down Baby Change Unit	

Important Building Information

All Portaloo buildings are thoroughly cleaned and tested prior to delivery. An electrical test certificate and functional plumbing test certificate are provided within the building for inspection.


The final connections from services on site into the Portaloo building should be carried out by a suitably qualified and competent professional.

The following services are excluded unless otherwise stated. A quotation is available on request:

- ▶ Foundation pads and enabling works
- ▶ On site supervision of installation and removal activities
- ▶ Final connection to services provided by others
- ▶ Chlorination of pipe work
- ▶ WRAS compliance - upgrade of all fittings to meet the Water Supply (Water Fitting) Regulations 1999
- ▶ Foul waste containment and mains free potable water solutions
- ▶ Access solutions
- ▶ Replenishment of consumables
- ▶ Damage waiver insurance

PL282-V

Male/Female and Accessible Toilet

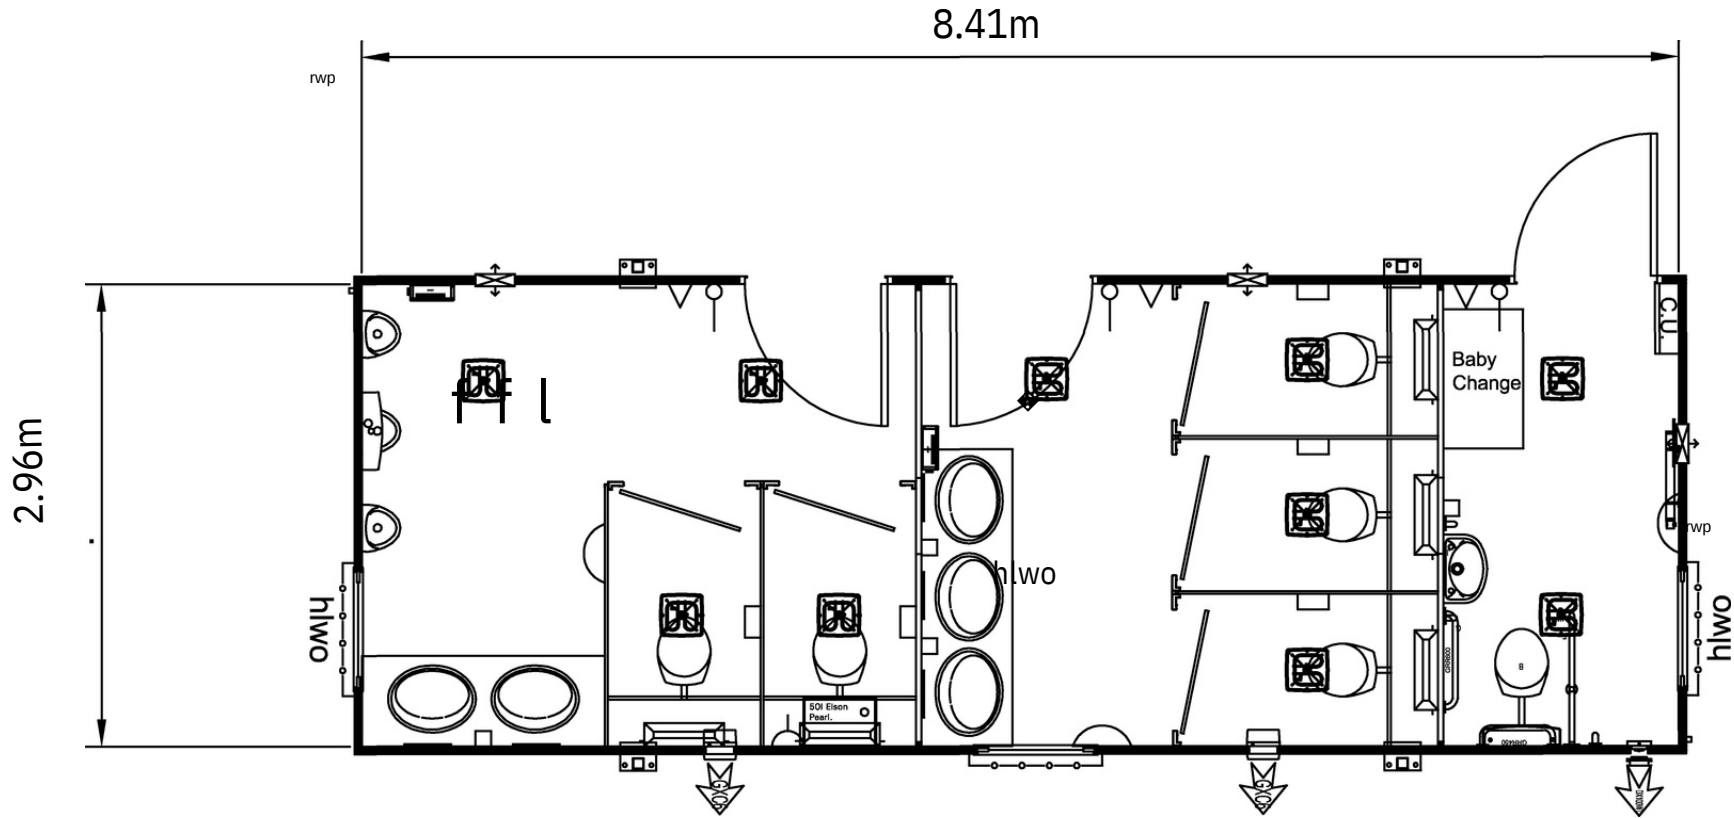

Floor Area 24.87 m²
Ceiling Height 2.3 m